
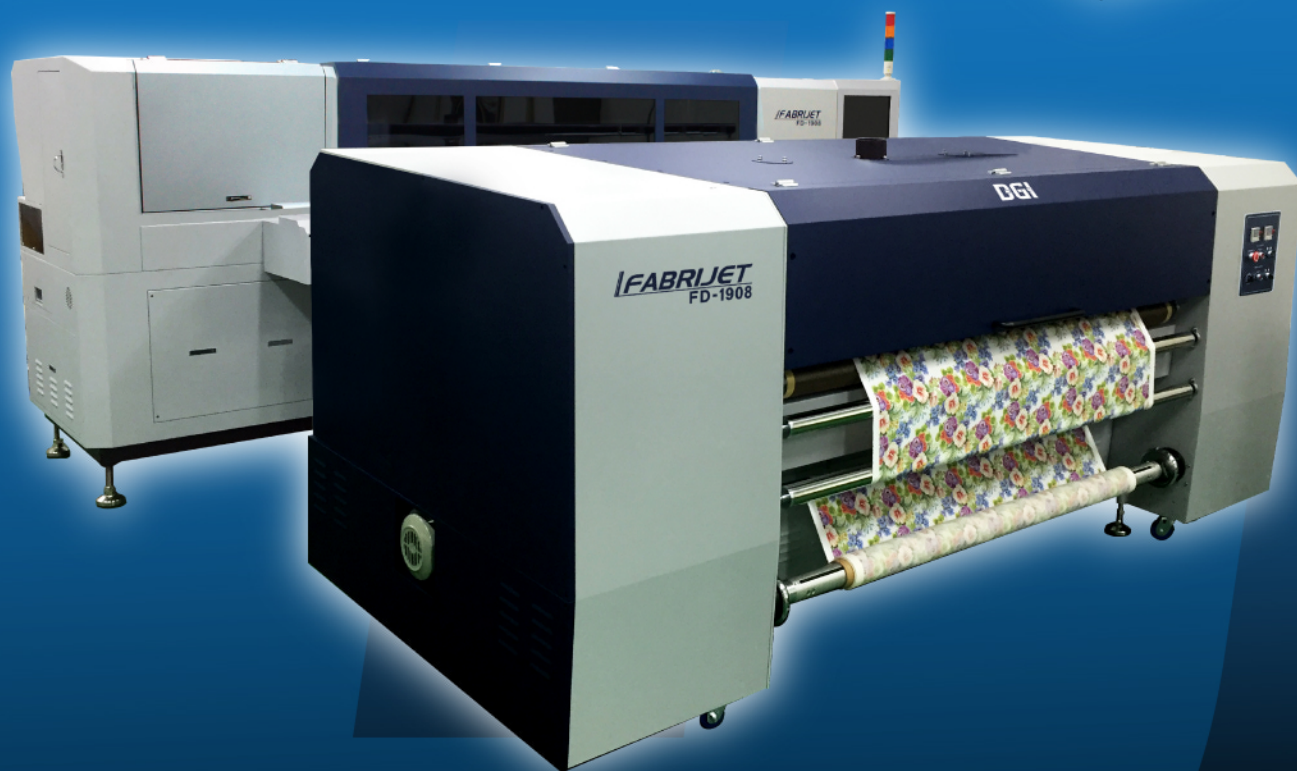


MAX.
200sqm/h

FABRIJET

FD-1908

DIRECT TEXTILE PRINTER

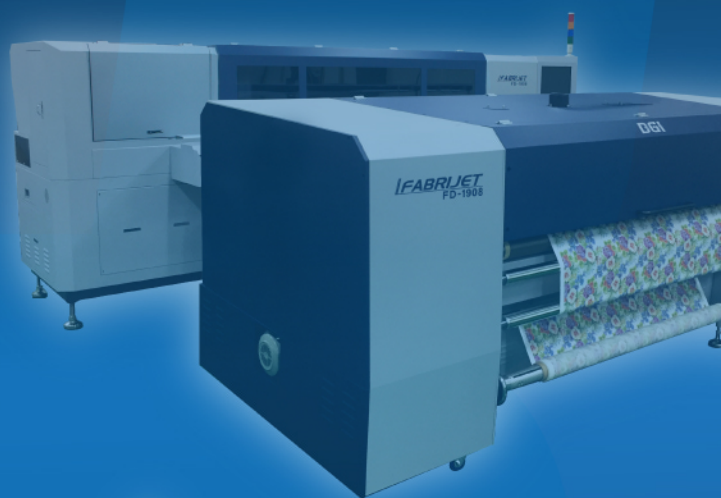

See product information from DGI App & DGI facebook




Technical Specification

Print Speed	Draft Mode 200 m ² /hr	Production Mode 110 m ² /hr	Quality Mode 75 m ² /hr
Print Resolution	600 x 600dpi (1 Pass)	600 x 1,200dpi (2 Pass)	600 x 1,800dpi (3 Pass)
Max Print Width	1,850 mm		
Max Media Width	1,900 mm		
Print Mode	Bi-Direction / Uni-Direction , Normal / Interleave I, II / DBF I, II, III		
Printhead	Kyocera printhead (8 heads)		
Color	8 Color - Cyan, Magenta, Yellow, Black, Blue, Red, Orange, Gray		
Ink	DGI original water based F210 Ink (Reactive)		
Interface	TCP / IP		
Environmental Range	Temperature : 20~28 °C Humidity : 40~70% Environment condition may affect on final printing quality.		
Electricity Requirements	Printer : 200~240V/11A Dryer : 3Phase 380V/40A		

※ All specifications are subject to change without notice.

Dimension for Installation

	Uncrated				Crated			
	Length (mm)	Width (mm)	Height (mm)	Weight (kg)	Length (mm)	Width (mm)	Height (mm)	Weight (kg)
Printer	4,410	1,820	2,080	1,630	4,700	2,000	2,150	2,400
Dryer	3,720	1,500	1,600	1,265	4,000	1,800	1,850	1,700

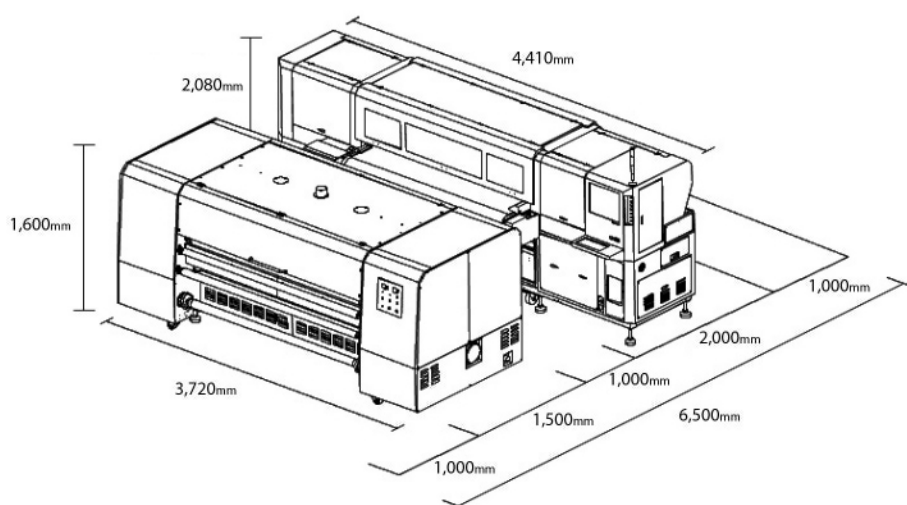

DGI Original Ink

MODEL	F210 (Standard Original)
Type	Water based Reactive
Capacity	5 Kg / Bottle
Color	C, M, Y, K, Red, Orange, Blue, Gray
Compatible	FD-SERIES



52, Cheongdam-Ro, Yangju-si, Gyeonggi-do, Korea, 482-020
 TEL : +82-31-820-8900 A/S : +82-31-820-8880
 FAX : +82-31-820-8990 E-MAIL : sales@dgi-net.com
www.dgi-net.com
www.facebook.com/dgikorea



ISO 9001:14001 Certified